










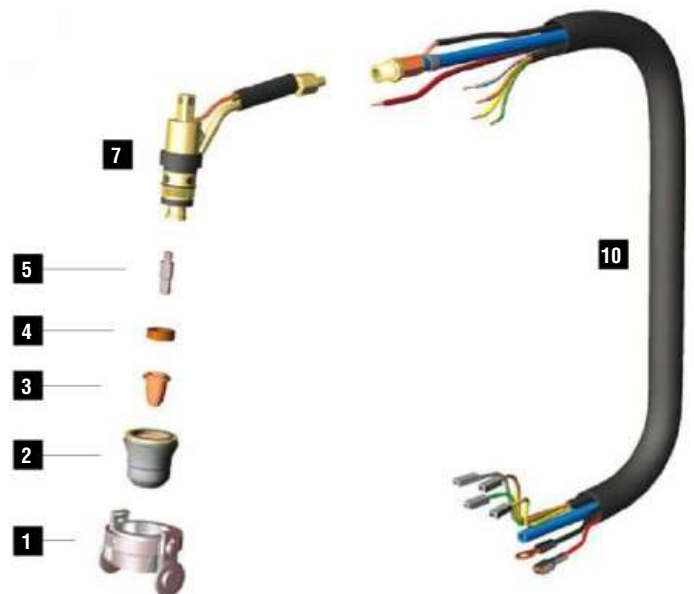
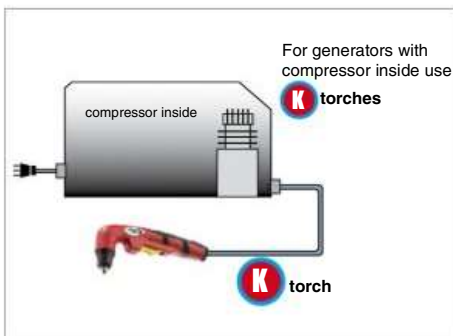
ERGOCUT S 25K

CE EN60974-7



CODE	↔		
PAS004M-096-BB3	4 m	12.5'	 DIRECT 4 WIRES

TECHNICAL DATA		
 NO HF	ERGOCUT S 25K	
 1 m	0,4 kg	0.88 lb
 V PEAK	500	
	2 bar	
	31 l/min	
 X 35%	20A	
	4-6 mm	5/32"-1/4"



	CODE		description	Ø		↔		CONTACT		DRAG		GOUGING	REF		
1	CV0024		stand off guide	23,5 mm		33 mm									1
2	PC0117		nozzle (1 ring)			28 mm									4
3	PD0103-09		40 A	0,9 mm	.035"	25,8 mm								-	10
3	PD0103-65		20 A	0,65 mm	.025"	25,8 mm								-	10
3	PD0116-06		20 A	0,6 mm	.023"	17,3 mm								-	10
3	PD0116-08		30 A	0,8 mm	.030"	17,3 mm								-	10
3	PD0116-09		40 A	0,9 mm	.035"	17,3 mm								-	10
4	PE0106		Swirl ring			4,6 mm							60028		2
5	PR0106		electrode			30,5 mm									10
5	PR0110		electrode			21,8 mm									10

	CODE		description	
7	EA0330		o-ring	10
7	PF0127		Ergocut S25K-S35K-S25-S45	1
8	TP0400		trigger kit	1

	CODE		description	
9	TP0401		handle kit	1
10	PH4015		cable assembly - 4 m / 12' - direct 4 wires	1

STANDARD CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING